

Mini Converter Optical Fiber 12G



Mini Converter Optical Fiber 12G converts SDI to optical fiber and optical fiber to SDI in both directions at the same time, you can even have different video standards going in each direction! The 12G-SDI connections are multi rate, which makes it compatible with all SD, HD and Ultra HD formats and equipment up to 2160p60, including Level A and B devices. You can install any standard 3G, 6G or 12G-SDI SFP optical fiber module so you can send SDI using the same low cost optical fiber cables that are commonly used for computer networks.

\$155

Connections

SDI Video Inputs

1 x SD, HD and 12G-SDI Video and 1 x Optical Fiber Input.

SDI Video Outputs

Automatically matches the SD, HD and 12G-SDI video input on the Optical Fiber.

Optical Fiber Connection (optional)

1 x SMPTE optical fiber SFP socket. Optical fiber SFP module sold separately.

Optical Fiber Video Inputs

1 x 10 bit SD/HD/12G-SDI switchable.

Optical Fiber Video Outputs

Automatically matches the SD, HD and 12G-SDI video input.

Optical Fiber Audio Inputs

16 channel embedded.

Optical Fiber Audio Outputs


16 channel embedded.

Multi Rate Support

Auto detection of SD, HD or 12G-SDI.

Reclocking

Yes

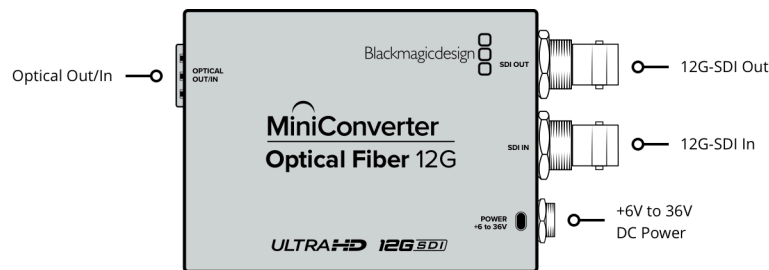

Standards

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60,
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60, 1080PsF23.98,
1080PsF24, 1080PsF25,
1080PsF29.97, 1080PsF30, 1080i50,
1080i59.94, 1080i60

2K Video Standards

2K DCI 23.98p, 2K DCI 24p, 2K DCI
25p, 2K DCI 23.98PsF, 2K DCI 24PsF,
2K DCI 25PsF

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,
2160p29.97, 2160p30, 2160p50,
2160p59.94, 2160p60

4K Video Standards

4K DCI 23.98p, 4K DCI 24p, 4K DCI
25p

SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE
296M, SMPTE 424M-B, SMPTE 425M,
SMPTE 424M-B, SMPTE ST-2081, ITU-
R BT.656, ITU-R BT.601 and SMPTE
297M for Optical Fiber SDI.

SDI Video Rates

SDI video connections are switchable
between SD, HD, Ultra HD and
DCI 4K.

SDI Video Sampling

4:2:2 and 4:4:4

SDI Audio Sampling

Television standard sample rate of
48 kHz and 24-bit.

SDI Color Precision

4:2:2 and 4:4:4

SDI Color Space


YUV and RGB

SDI Auto Switching

Automatically detects SD, HD or 12G-
SDI.

ASI Support

Yes

Operating Systems

Mac 10.14 Mojave,
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

Settings Control

No user controls.

Power Requirements**Power Supply**

+12V universal power supply included
with international socket adapters for
all countries. Cable tie point.


Power Consumption

2 Watts

Operational Voltage Range

6 - 36V DC

Physical Specifications

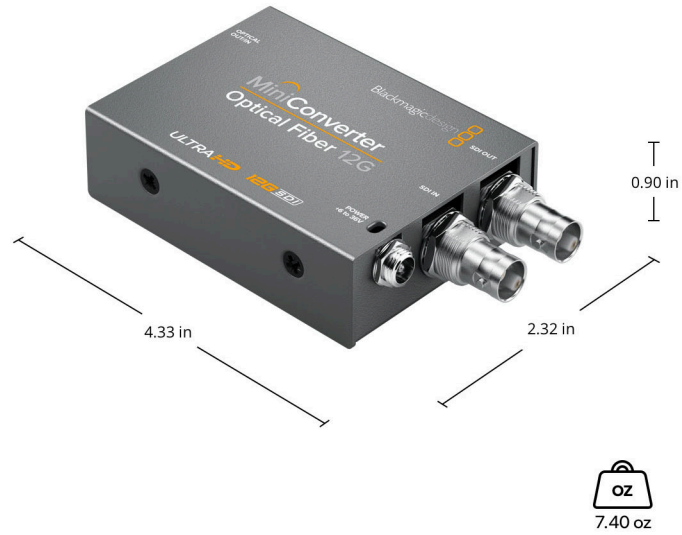

Environmental Specifications

Operating temperature

0° to 40° C (32° to 104° F)

Storage temperature

-20° to 45° C (-4° to 113° F)

Relative Humidity

0% to 90% non-condensing

What's Included

Mini Converter Optical Fiber 12G
+12V universal power supply with international socket adapters

Warranty

3 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2020, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller